
Actions-micro AM8370 Datasheet

Document Number: AM8370 Datasheet

Revision 1.0.0

Release date: 11/09/2021

Actions Microelectronics Co., Ltd.

**701, 7floor, Golder Plaza, No.10 huayuangonglu, Haidian District,
Beijing, China**

Declaration

Circuit diagrams and other information relating to products of Actions Microelectronics Company, Ltd. - are included as a means of illustrating typical applications. Consequently, complete information sufficient for construction purposes is not necessarily given. Although the information has been examined and is believed to be accurate, Actions-micro makes no representations or warranties with respect to the accuracy or completeness of the contents of this publication and disclaims any responsibility for inaccuracies. Information in this document is provided solely to enable use of Actions-micro presented in this document does not form part of any quotation or contract for sale. Actions-micro assumes no liability whatsoever, including infringement of any patent or copyright, for sale and use of Actions-micro products, except as may expressly be provided in Actions-micro. All sales of any Actions-micro products are expressly conditional on your agreement to the terms and conditions of the most recently dated version of Actions-micro date of your order.

The provision of this information does not convey to the purchaser of the described semiconductor devices any licenses under any patent rights, copyright, trademark rights, rights in trade secrets and/or know how, or any other intellectual property rights of Actions-micro or others, however denominated, whether by express or implied representation, by estoppel, or otherwise.

Information contained herein relates solely to the Actions-micro products described herein and abrogates and supersedes, as of the release date of this publication, all previously published data and specifications relating to such products provided by Actions-micro or by any other person purporting to distribute such information. Actions-micro reserves the right to make changes to specifications and product descriptions at any time without notice. Contact your Actions-micro sales representative to obtain the latest specifications before placing your product order. Actions-micro product may contain design defects or errors known as anomalies or errata which may cause currently characterized anomalies or errata are available upon request. Designers must not rely on the absence or characteristics of any features or instructions of Actions-micro. Actions-micro reserves these for future definition and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to them.

Actions-micro other application where product failure could cause or contribute to personal injury or severe property damage. Any and all such uses without prior written approval of an Officer of Actions-micro and further testing and/or modification will be fully at the risk of the customer.

ACTIONS-MICRO DISCLAIMS AND EXCLUDES ANY AND ALL WARRANTIES, INCLUDING WITHOUT LIMITATION ANY AND ALL IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE, AND AGAINST INFRINGEMENT AND THE LIKE, AND ANY AND ALL WARRANTIES ARISING FROM ANY COURSE OF DEALING OR USAGE OF TRADE.

IN NO EVENT SHALL ACTIONS-MICRO BE RELIABLE FOR ANY DIRECT, INCIDENTAL, INDIRECT, SPECIAL, PUNITIVE, OR CONSEQUENTIAL DAMAGES; OR FOR LOST DATA, PROFITS, SAVINGS OR REVENUES OF ANY KIND; REGARDLESS OF THE FORM OF ACTION, WHETHER BASED ON CONTRACT; TORT; NEGLIGENCE OF ACTIONS-MICRO OR OTHERS; STRICT LIABILITY; BREACH OF WARRANTY; OR OTHERWISE; WHETHER OR NOT ANY REMEDY OF BUYER IS HELD TO HAVE FAILED OF ITS ESSENTIAL PURPOSE, AND WHETHER ACTIONS-MICRO HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES OR NOT.

Copyright © Actions Microelectronics Co., Ltd 2010. All rights reserved.

Table of Contents

Terms and Acronyms

General Conventions

Declaration	2
1 Introduction.....	8
1.1 Overview	8
1.2 Block Diagram.....	9
2 Feature	10
3 Power on Sequence	12
4 Registers.....	!
4.1 Multi-Function PAD Config Registers	!
4.1.1 MFP Configuration Register-0.....	!
5 Pin Out Specification	13
5.1 Pin out table.....	13
5.2 Pin out diagram.....	16
6 Operating Conditions	17
7 Crystal Requirements.....	18
8 Mechanical Specification.....	19

Revision History

Version	Date	Description	Author
1.0.0	11/09/2021	Initial Create	maweishuo

Terms and Acronyms

Terms and Acronyms	Definition
CF	Compact Flash
SM	Smart Media
XD	xD picture
SD	Secure Digital
Micro SD	Micro Secure Digital
MS	Memory Stick
MS Pro	Memory Stick Pro
MMC	Multimedia Card
SDRAM	Synchronous Dynamic Random Access Memory
MD	MicroDrive
TF	T Flash
LCD	Liquid Crystal Display
ICE	In-circuit emulation, or in-circuit emulator
JTAG	Joint Test Action Group(ANSI/ICEEE Std.11149.1-1990)
PQFP	Plastic Quad Flat Package
LQFP	Low-Profile Quad Flat Package
BGA	Ball Grid Array
PIP	Picture In Picture
TAP	TEST ACCESS PORT
RGB	Red-Green-Blue color space representation
TCON	Timing controller

General Conventions

Symbol	Description
--------	-------------

1 Introduction

1.1 Overview

The AM8370 processor from Actions-Micro is a highly integrated mix signal SoC target at multi-media applications. The AM8370 emmedded CPU is a high performance, low power 32bit RISC core with DSP instruction extension, which can run as fast as 700MHz.

The AM8370 integrated lossless or near-lossless image/video compress and de-compress module which can transfer 1080P video with format RGB888 through 1Gbit/s Ethernet.

The AM8370 multi-media processor provided display solutions with the help of on chip HDMI transmitter and receiver interface.

AM8370 is also integrated with 1 USB OTG controllers, UART, I2C, SPI, etc.

Block Diagram



AM8370 BLOCK DIAGRAM

2 Feature

The AM8370 provides high level of system integration to support a wide variety of applications. The features of the AM8370 include:

- ✓ **32BIT RISC CORE**
 - 32K byte instruction cache and data cache
 - F/W can program from DC up to 800MHz transparently
 - DSP instruction for multi-media acceleration
 - Static design allows changing clock at run-time for power saving
- ✓ **VIDEO ENCODER**
 - 60 frames per second at 1920x1080 resolution for video all format
- ✓ **IMAGE/VIDEO COMPRESSOR**
 - Support upto 1080P Resolution
 - Support 8bit YCbYCr/RGB
 - Adaptive compress ratio up to 1:6
 - Lossless or Near-lossless compress
- ✓ **OSD**
 - 1,2 OSD bitmap data width
 - 256x128 size in 2 bit or 256x256 in 1 bit
- ✓ **DISPLAY INTERFACE**
 - HDMI Tx support, industry standard compliance HDMI 1.2
 - HDMI Rx support, industry standard compliance HDMI 1.3a
- ✓ **AUDIO**
 - I2S IN & I2S OUT interface
 - Support 32 levels volume control
- ✓ **Ethernet MAC**
 - Support MII/RMII/RGMII up to 1Gbps rate
 - Support SDIO interface for WIFI transfer
- ✓ **Transfer Schedule Manager**
 - Transfer compressed video/audio data through Ethernet
 - Receive compress video/audio data through Ethernet
 - The transferred video upto 1920x1080 60fs
- ✓ **MEMORY Storage**

-
- DDR2/3 SDRAM up to 4Gb @ 16bit up to 1066Mbps
 - OTP ROM 64bit Chip ID

✓ **DMA CONTROLLER**

- 8 physical channels and 4 bus channels
- Stride mode support
- Software configurable priority

✓ **Boot ROM**

- On chip boot ROM with boot loader
- The system could be loaded from SPI Nor flash

✓ **USB 2.0 OTG**

- Complies with Universal Serial Bus Specification. Revision 2.0.
- Complies with On-The-Go Supplement to the USB2.0 Specification Revision 1.0a.
- Supports point-to-point communication with one low-speed, full-speed or high-speed device in Host mode.
- Supports full-speed or high-speed in peripheral mode.
- Supports USB Mass Storage Class Bulk-Only Transport Revision 1.0 as host or device.
- Supports Electronic still picture imaging Picture Transfer Protocol (PTP)
- Supports direct print function using pict-bridge
- Supports Universal Serial Bus Device Class Definition for Printing Devices Version 1.1 as host
- Supports Universal Serial Bus Still Image Capture Device Definition Revision 1.0 as host
- Configurable/programmable size of endpoints.
- Configurable/programmable single, double, triple or quad buffering.
- Programmable type of endpoints.
- Supports high-speed high-bandwidth Isochronous and Interrupt transfer.
- Supports suspend, resume and power managements function.
- Support USB wakeup

✓ **OTHER INTERFACE**

- UART/I2C/SPI
- 3 external interrupts
- 35 configurable GPIO shared with function pins

✓ **POWER**

- 1.3v for core
- 3.3v/2.5v/1.8/1.5v for mac io, 3.3v for others
- Core PLL, LCD PLL, Audio PLL and DDR PLL support spread spectrum

✓ **PACKAGE**

- QFP 128pin (epad), 14x14mm

3 Power on Sequence

The power on sequence requirements of the AM7xxx and AM8xxx products are the same, which are shown in the following figure. VDD represents the power pins supplying power for the core. VCC represents the power pins supplying power for the general purpose pads. SVCC represents the power pins supplying power for the DDR2 or DDR3 SDRAM related pads. P_RESETB is the asynchronous reset pin. PWROK is an internal signal. It is low during the power-on phase to reset all the registers in the chip. The system boots at the moment when PWROK turns to high.

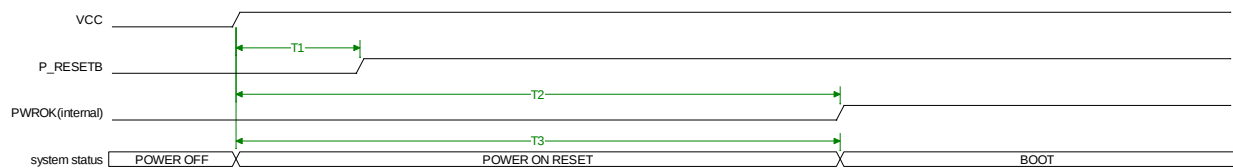


Figure 1 Power on Sequence Diagram

Timing Requirements:

1. $T1$ 20ms
2. $T2$ 128ms
3. $T3$ is equal to the greater one between $T1$ and $T2$
4. The power on sequence of VDD/VCC/SVCC is not cared

4 Pin Out Specification


Pin out table

PIN NUM	PIN NAME	TYPE	Function
1	P_SPINSS	B	SPI_NSS
2	VCC3	PWR	VCC3
3	DVCC_PLL	PWR	AVCC_PLL2
4	HOSCI	A	HOSCI
5	HOSCO	A	HOSCO
6	AVCC2	PWR	AVCC2
7	VDD	PWR	VDD
8	EXT_R	A	EXT_R
9	AVDD33	PWR	AVDD33
10	RXCN_CH	A	RXCN_CH
11	RXCP_CH	A	RXCP_CH
12	RX0N_CH	A	RX0N_CH
13	RX0P_CH	A	RX0P_CH
14	RX1N_CH	A	RX1N_CH
15	RX1P_CH	A	RX1P_CH
16	RX2N_CH	A	RX2N_CH
17	RX2P_CH	A	RX2P_CH
18	AVDD12	PWR	AVDD12
19	HDMI_ON0	A	HDMI_ON0
20	HDMI_OP0	A	HDMI_OP0
21	AVCCPLL	PWR	AVCCPLL
22	HDMI_ON1	A	HDMI_ON1
23	HDMI_OP1	A	HDMI_OP1
24	HDMI_ON2	A	HDMI_ON2
25	HDMI_OP2	A	HDMI_OP2
26	DVCCPAD	PWR	DVCCPAD
27	HDMI_ON3	A	HDMI_ON3
28	HDMI_OP3	A	HDMI_OP3
29	CECTX	A	CEC_DAC
30	CECRX	A	CEC_DAC
31	P_I2C1SCL	B	I2C1SCL
32	P_I2C1SDA	B	I2C1SDA
33	VCC1	PWR	VCC1
34	P_RESETB	B	RESETB

36	P_UARTRX1	B	GPIO18
37	P_EXTINT0	B	EXTINT0
38	P_EXTINT1	B	GPIO32/I2STMCLK
39	P_I2SSCK	B	I2SSCK/IRRX
40	P_I2SSD	B	I2SSD/I2STSD
41	P_I2SWS	B	I2SWS/I2STWS
42	P_MACRVLD	B	RGMII_RXCTL
43	P_MACMDIO	B	MACMDIO
44	P_MACMDC	B	MACMDC
45	P_MACTVLD	B	RGMII_TXCTL
46	P_MACTD1	B	RGMII_TXD0
47	P_MACTD0	B	RGMII_TXD1
48	P_MACTCLK	B	RGMII_TXCLK
49	VCC0(2.5V)	PWR	VCC0(2.5V)
50	P_MACRD1	B	RGMII_RXD1
51	P_MACRD0	B	RGMII_RXD0
52	P_MACTD2	B	RGMII_TXD2
53	P_MACTD3	B	RGMII_TXD3
54	P_MACRD2	B	RGMII_RXD2
55	P_MACRD3	B	RGMII_RXD3
56	P_MACTER	B	MAC_CLKO
57	P_MACRCLK	B	RGMII_RXCLK
58	VDD	PWR	VDD
59	AVCC	PWR	AVCC
60	VBUS0	A	VBUS0
61	DM0	A	DM0
62	DP0	A	DP0
63	UVCC0	PWR	UVCC0
64	DRVVBUS0	B	DRVVBUS0
		B	DDCSCL/GPIO20
		B	DDCSDA/GPIO21
		PWR	VCC2
		B	UARTRX0
		B	UARTTX0
		PWR	VDD
		PWR	SVCC

79	P_DDRBA1	B	P_DDRBA1
80	P_DDRBA0	B	P_DDRBA0
81	P_DDRBA2	B	P_DDRBA2
82	P_DDRWEB	B	P_DDRWEB
83	VDD	PWR	VDD
84	SVCC	PWR	SVCC
85	P_DDRDQ4	B	P_DDRDQ4
86	P_DDRDQ3	B	P_DDRDQ3
87	P_DDRDQ1	B	P_DDRDQ1
88	P_DDRDQ6	B	P_DDRDQ6
89	P_DDRDQ12	B	P_DDRDQ12
90	P_DDRDQ11	B	P_DDRDQ11
91	P_DDRDQ9	B	P_DDRDQ9
92	P_DDRDQ14	B	P_DDRDQ14
93	P_DDRDM1	B	P_DDRDM1
94	P_DDRDM0	B	P_DDRDM0
95	VDD	PWR	VDD
96	SREF	B	SREF
97	P_DDRDQS0	B	P_DDRDQS0
98	P_DDRDQSB0	B	P_DDRDQSB0
99	P_DDRDQS1	B	P_DDRDQS1
100	P_DDRDQSB1	B	P_DDRDQSB1
101	P_DDRDQ15	B	P_DDRDQ15
102	P_DDRDQ8	B	P_DDRDQ8
103	P_DDRDQ10	B	P_DDRDQ10
104	P_DDRDQ13	B	P_DDRDQ13
105	P_DDRDQ7	B	P_DDRDQ7
106	P_DDRDQ0	B	P_DDRDQ0
107	P_DDRDQ2	B	P_DDRDQ2
108	P_DDRDQ5	B	P_DDRDQ5
109	SVCC	PWR	SVCCI
110	P_DDRCLK	B	P_DDRCLK
111	P_DDRCLKB	B	P_DDRCLKB
112	P_DDRODT	B	P_DDRODT
113	P_DDRRASB	B	P_DDRRASB
114	P_DDRCSEB	B	P_DDRCSEB
115	P_DDRCASB	B	P_DDRCASB
116	VDD	PWR	VDD
117	P_DDRA0	B	P_DDRA0

4.1 Pin out diagram

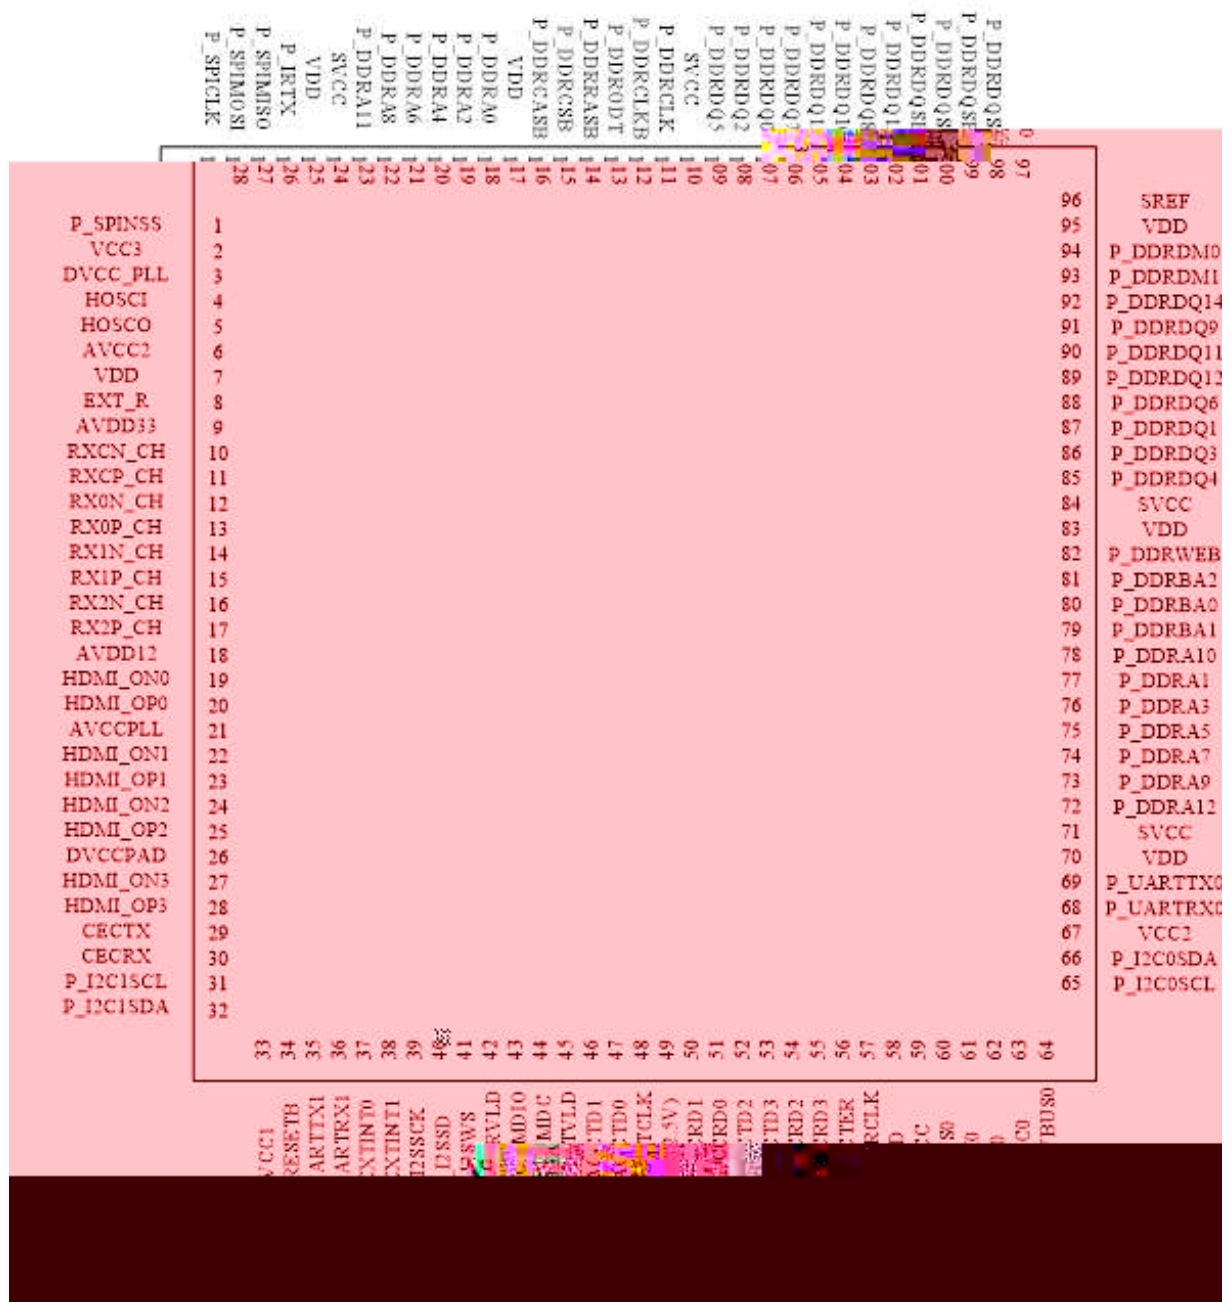

AM370 PIN-OUT DIAGRAM

5 Operating Conditions

Absolute Maximum Ratings

SYMBOL	PARAMETER	RATING	UNITS
V _{CC}	Power Supply (3.3V)	3.8	V
V _{SVCC}	Power Supply (1.5V)	1.575	V
V _{DD}	Power Supply (1.35V)	1.4	V
V _{IN}	Input Voltage	-0.5~4.6	V
V _{OUT}	Output Voltage	-0.5~4.6	V
T _{STG}	Storage Temperature	0~75	°C
T _C	Operation Temperature (Case Surface)	0~70	°C
T _a	Ambient Temperature	0~60	°C

Recommended Operation Conditions

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS
V _{CC}	Power Supply (3.3V)	3.0	3.3	3.6	V
V _{SVCC}	Power Supply (1.5V)	1.425	1.5	1.575	V
V _{DD}	Power Supply (1.35V)	1.3	1.35	1.4	V
T _a	Ambient Temperature	0	35	60	°C

DC Electrical Characteristics for 3.3 volts operation

(Under Recommended Operating Conditions and V_{CC} = 3.0V~3.6V, T_J = 0 to +70) °C

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
V _{IL}	Input Low Voltage				0.8	V
V _{IH}	Input High Voltage		2.2			V
V _{T-}	Schmitt Input Low Voltage				0.9	V
V _{T+}	Schmitt Input High Voltage		1.9			V
V _{OL}	Output Low Voltage	4mA			0.4	V
V _{OH}	Output High Voltage	4mA	2.4			V

6 Crystal Requirements

Requirements for 24MHz oscillator.

Description	Specification Requirement
Nominal Frequency	24MHz
Oscillation Mode	Fundamental
Frequency Tolerance at 25	30ppm
Temperature Stability	50ppm
Shunt Capacitance (Co)	7pF max
Load Capacitance (CL)	12pF~18pF
Equivalent Series Resistance (ESR)	50ohm max
Drive Level	500uW max
Aging (at 25)	3ppm/year
Insulation Resistance	10meg
Net Weight	This will be various. No limitation.
Operating Temperature Range	-10~85
Storage Temperature Range	-45~125

Requirements for 32.768KHz oscillator.

Description	Specification Requirement
Nominal Frequency	32.768KHz
Oscillation Mode	Fundamental
Frequency Tolerance at 25	30ppm
Temperature Stability	50ppm
Shunt Capacitance (Co)	7pF max
Load Capacitance (CL)	12pF~18pF
Equivalent Series Resistance (ESR)	50ohm max
Drive Level	500uW max
Aging (at 25)	3ppm/year
Insulation Resistance	10meg
Net Weight	This will be various. No limitation.
Operating Temperature Range	-10~85
Storage Temperature Range	-45~125

7 Mechanical Specification

